




JWM-PATROL IN 12 STEPS

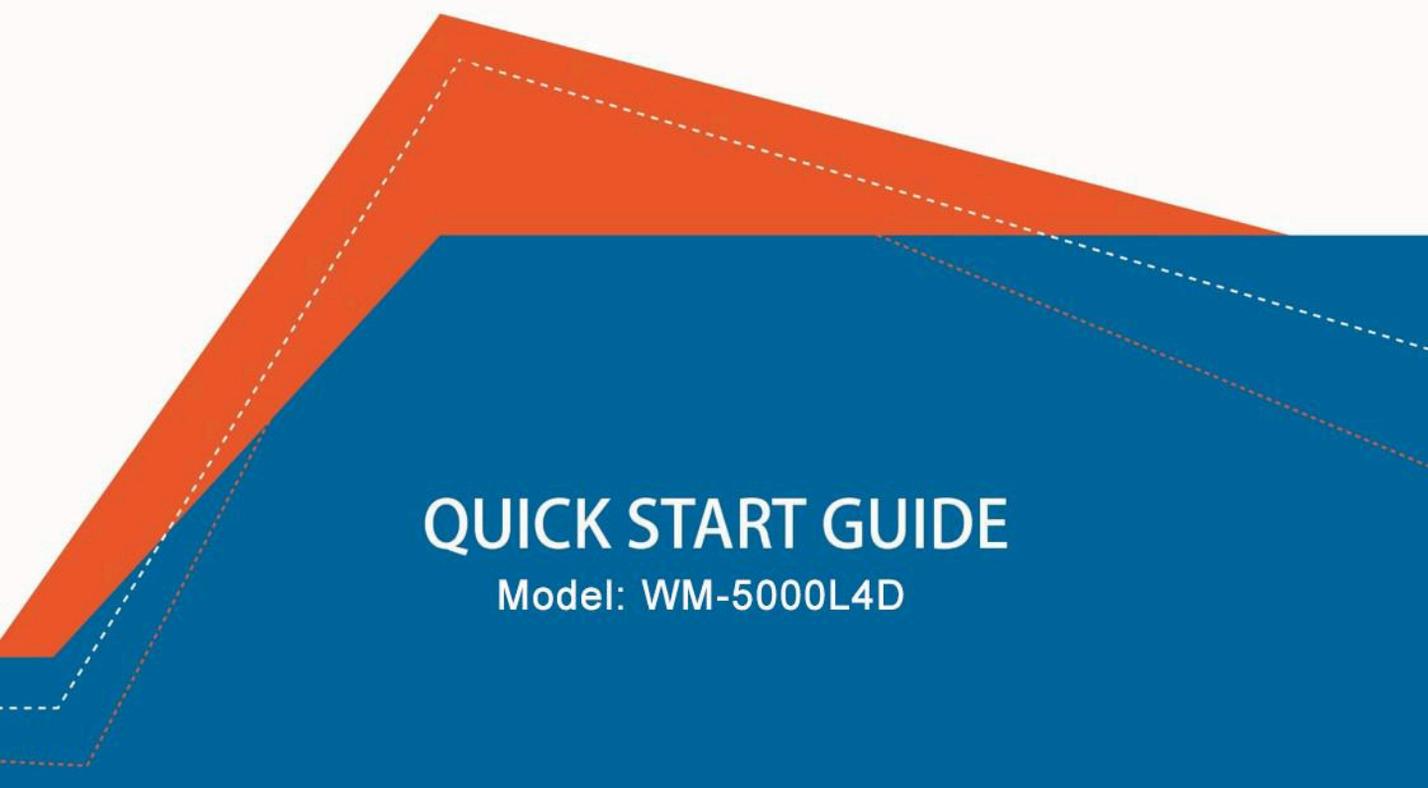

QUICK START GUIDE

Model: WM-5000L4D

A guard tour system

Welcome to JWM-Patrol!

This short guide will help you configure all basic settings needed to setup your JWM-Patrol account for first time and learn about all the necessary steps in order to quickly manage patrols.



Standby---Green light flashes once per 3 seconds

Low power---Red light flashes once per 3 seconds

Register the network ---Blue light flashes once per second

Register the network successfully---Device vibrate once and blue light is off

Register the network failed---Device vibrate 3 times and blue light is off

Sending successfully---Device will vibrate once

Sending failed---Device will vibrate 3 times

Power Button:

Power on: Press the power button for 2 seconds, the red light will be on for one second and the device vibrate once.

Power off: Press the power button for 2 second, the device will vibrate once.

SOS Button:

Press the SOS button for 3 seconds, the device will send alarm data.



Dial Key:
Press Dial Key once, the device will vibrate once, you could choose contacts by pressing dial key. Then you could press dial key for three seconds to dial, the device will vibrate for 1 second.




1 LOGIN YOUR ACCOUNT

Username: Supervisor Default

Password: 999

Click on "Log in" to enter the software

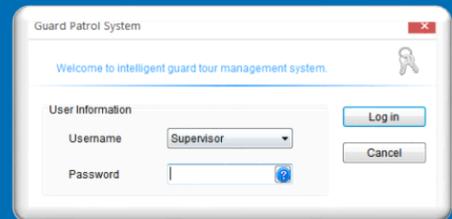


1

2 REGISTER YOUR DEVICE IN THE SOFTWARE

When enter the software first, it will prompt you to register the device. Please click on "Yes", the device will register automatically. Each model only need to register once.
Notice: please start register device page firstly, and then connect device with software via USB cable. It will register automatically.

When enter the software first, it will prompt you to register the device. Please click "Yes", the device will register automatically.

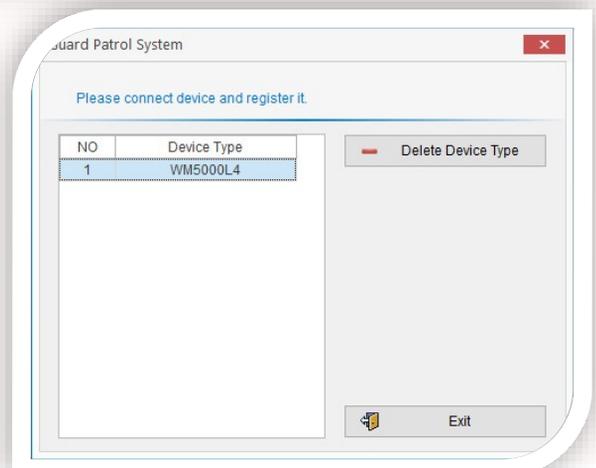

3 MANAGE YOUR COMPANY

1

Click on “Company Setup” under “Patrol Setup”, and click on “Add Company”



You can edit its name.
 You also can delete/modify company there.

Username: Supervisor
 Default Password: 999

Click “Log in” to enter the software




Notice: You could open this function at Data Maintain –Parameter Setup



1

4 REGISTER YOUR DEVICE IN THE SOFTWARE

4 MANAGE YOUR CHECKPOINTS

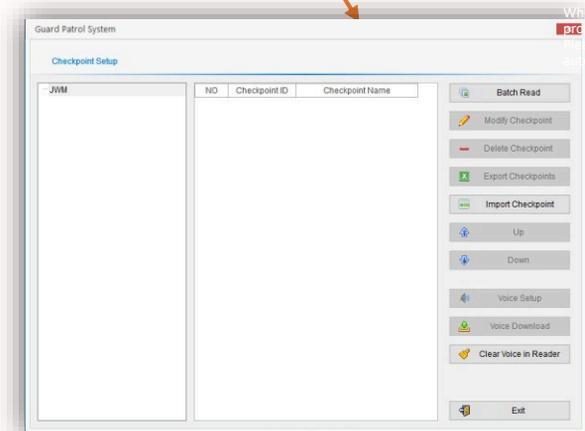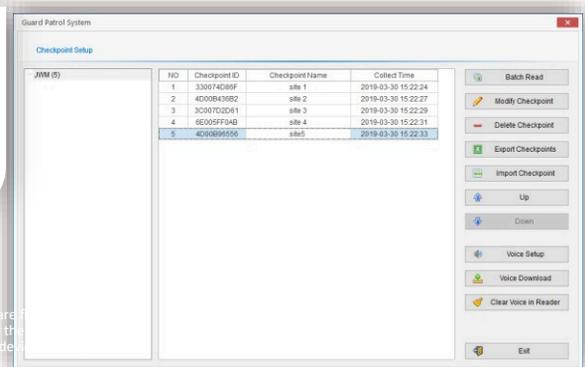
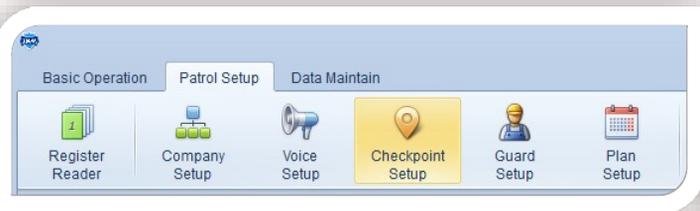


When you use the software for the first time, please connect the device to the computer.

Select one company, then use the device to read RFID Tags one by one. Connecting the device with computer and click on “Batch Read”, it will show checkpoints ID as you read. You can edit their names. You can also delete/modify checkpoints there.




Notice: Please do not put SIM card in device. Because If register network successfully, it will upload hesetags information.

5 MANAGE YOUR GUARDS (OPTIONAL)

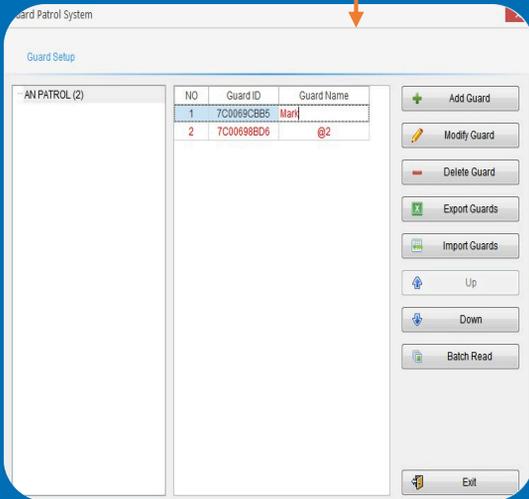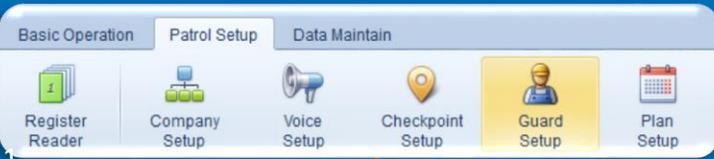

Select one company, then use the device to read Guard ID Tags one by one. Connecting the device with computer and click on "Batch Read", it will shows guards ID as you read. You can edit their names. You can also delete or modify guards there.

6 MANAGE YOUR PLAN

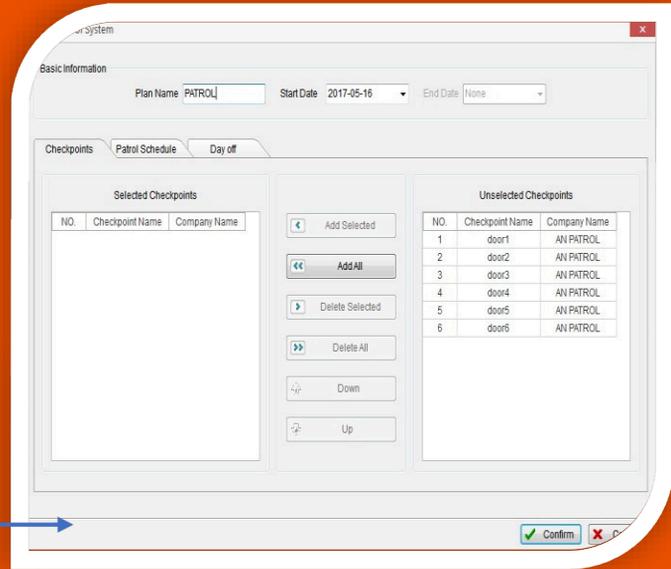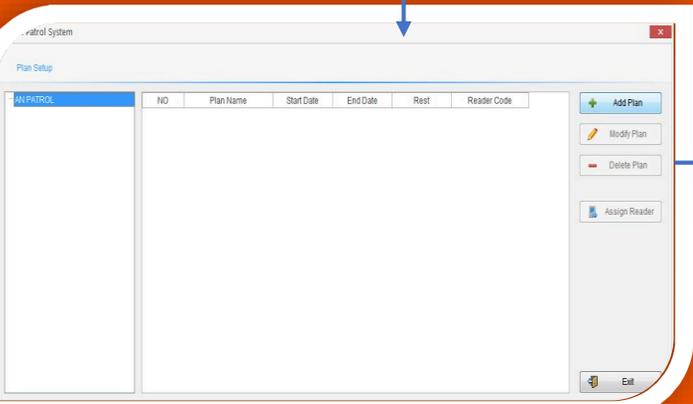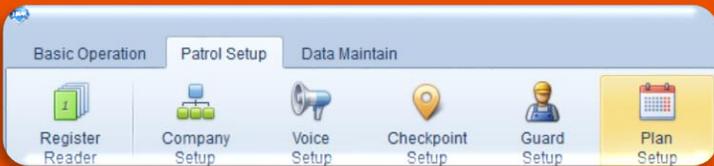

- 1) Click on "Patrol Setup" and select the "Plan Setup"
- 2) Click on "Add Plan"
- 3) Choose the checkpoints for your plan.

MANAGE YOUR GUARDS (OPTIONAL)

1




4) Select the “Patrol Schedule” and click on “Batch Schedule” or “Add Schedule”


Batch schedule : you could setup regular schedule.
Add schedule: you could add a single schedule.

5) Set the guard(optional), working hours and patrol frequency as your needs.

4

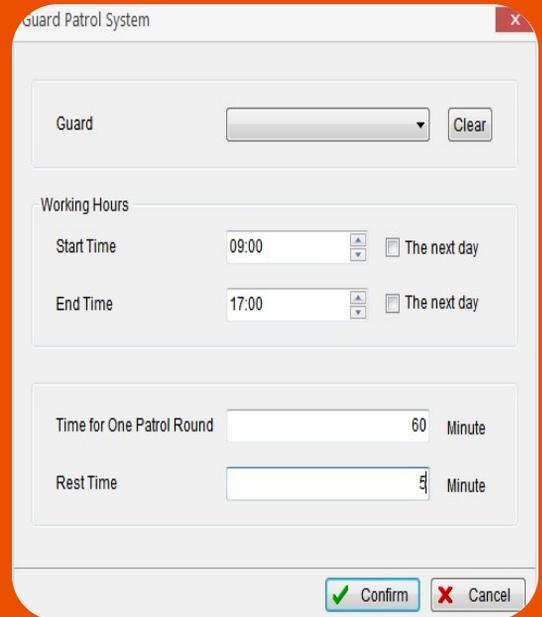

2

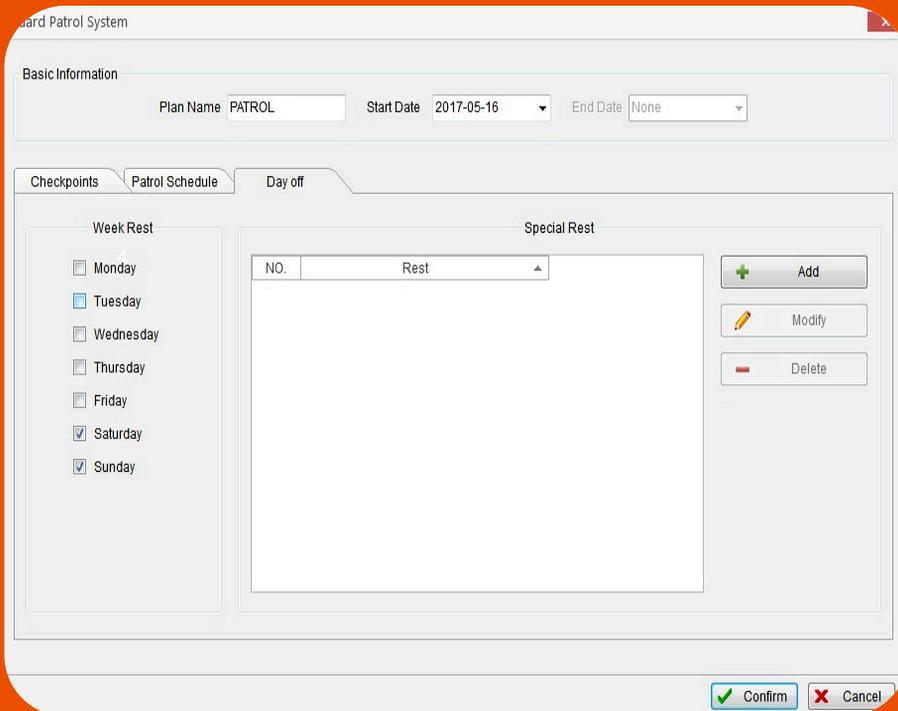

6) In the “Day off”, you can add the normal rest day in week rest, if you have special holiday, you can add it in special rest.



In the “communication parameter”, we need set the IP and APN for the device.

SIM Parameter Setup


APN

User


Password

Set the APN, User and Password of the SIM card in there. (You can confirm these with your SIM card supplier)

MANAGE YOUR CHECKPOINTS

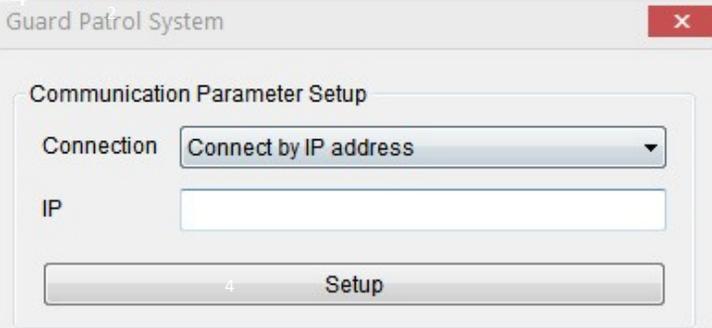

If you have static (fixed) IP address, please choose “**connect by IP address**”, and then fill in an IP address in below blank.

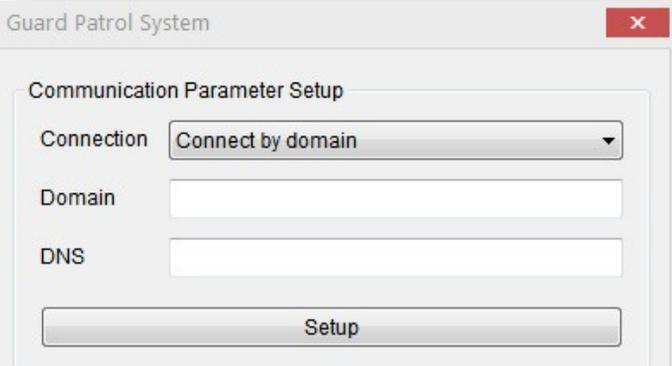

If you do not have static IP address, please choose “**connect by domain**”, and then we need download **dynamic DNS (domain name resolution) software** to get a domain name and DNS. (DNS is 8.8.8.8) (Or you can contact us)

8 RMOARNT AMGAEP YPOINUGR GUARDS (OPTIONAL)

192.168.1.1

192.168.1.1

TP-LINK®

150Mbps Wireless N ADSL2+ Modem Router

Advanced Quick Start Interface Setup **Advanced Setup** Access Management Maintenance Status Help

Firewall Routing NAT QoS VLAN ADSL

Virtual Server

Virtual Server for: Single IP Account

Rule Index: 1

Application: HTTP_Server

Protocol: ALL

Start Port Number: 3505

End Port Number: 3505

Local IP Address: 192.168.1.11

Virtual Server Listing

Rule	Application	Protocol	Start Port	End Port	Local IP Address
1	HTTP_Server	ALL	80	80	192.168.1.11
2	-	-	0	0	0.0.0.0
3	-	-	0	0	0.0.0.0
4	-	-	0	0	0.0.0.0
5	-	-	0	0	0.0.0.0
6	-	-	0	0	0.0.0.0
7	-	-	0	0	0.0.0.0
8	-	-	0	0	0.0.0.0
9	-	-	0	0	0.0.0.0
10	-	-	0	0	0.0.0.0
11	-	-	0	0	0.0.0.0
12	-	-	0	0	0.0.0.0

SAVE DELETE BACK CANCEL

How to do the Port Mapping

Enter your router, and find the Port Mapping or Port Forward. Then find your Local IP and input the Port ID 3505, 3505 is the port of our software. Then save the setting.

8 PMOARNT AMGAEP YPOINUGR GUARDS (OPTIONAL)

```
C:\Windows\system32\cmd.exe
Microsoft Windows [Version 6.3.9600]
(c) 2013 Microsoft Corporation. All rights reserved.

C:\Users\YuPeng>telnet 218.24.71.24 3505
```

1

```
Telnet 218.24.71.24
```






4 2

Test

Then we need test the port is open or not. Open your Telnet function in the Control Panel.
Press "Window Key and R", Go to "Run", input "cmd".
Input telnet your local IP and 3505. Such as telnet 218.24.71.24 (public fixed IP) 3505. Then press the "Enter"
When the port is open, it will show like this.


9 MANAGE YOUR GUARDS (OPTIONAL) TASK PROMPT SETUP

Step 1: Add Voice.
Step 2: Generate a voice file.
Step 3: Checkpoint Setup, select one checkpoint and then click voice setup, select voices
Step 4: Download voice

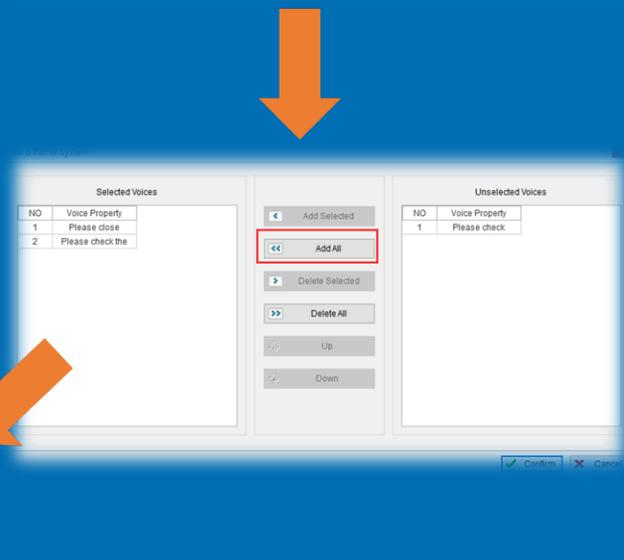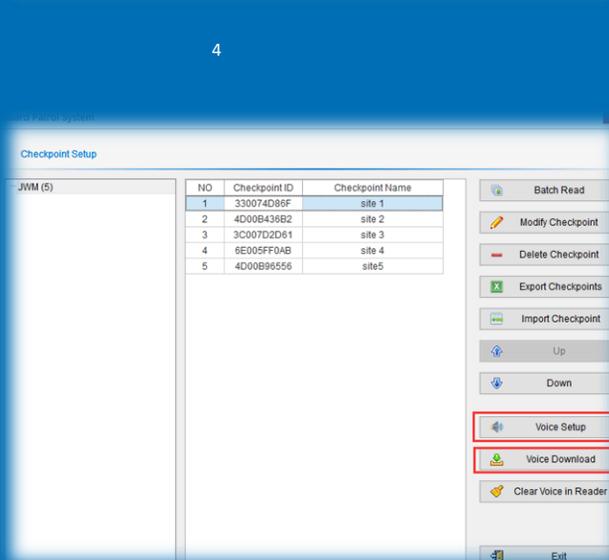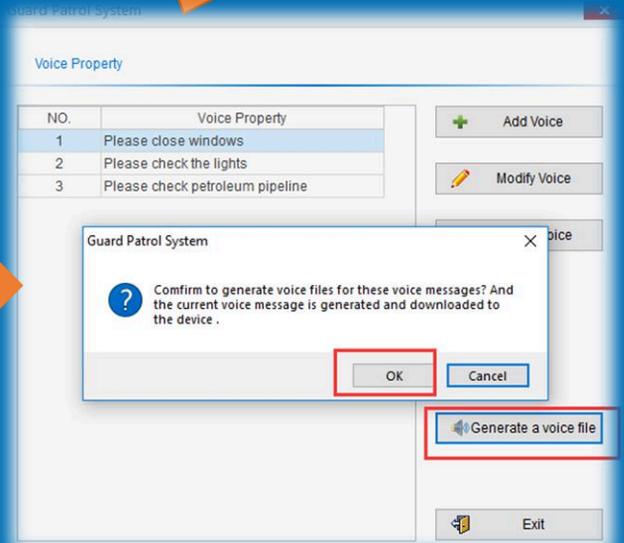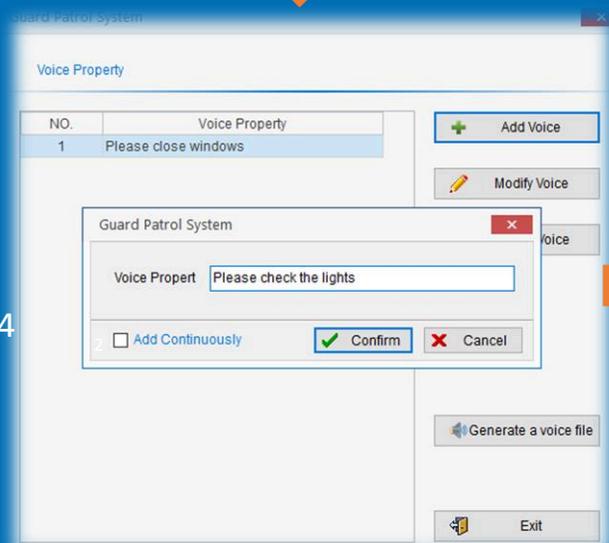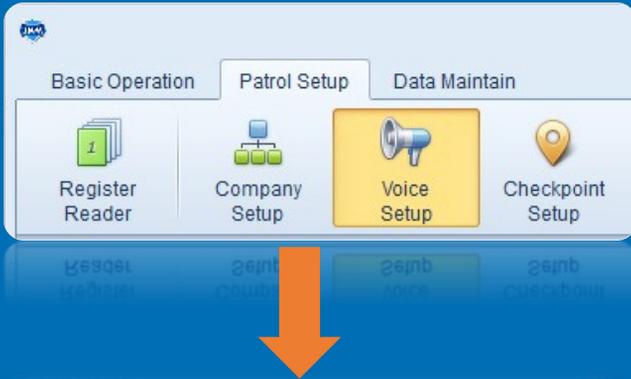


10 CMOANNTAACGTE SYEOTURP GUARDS (OPTIONAL)

1

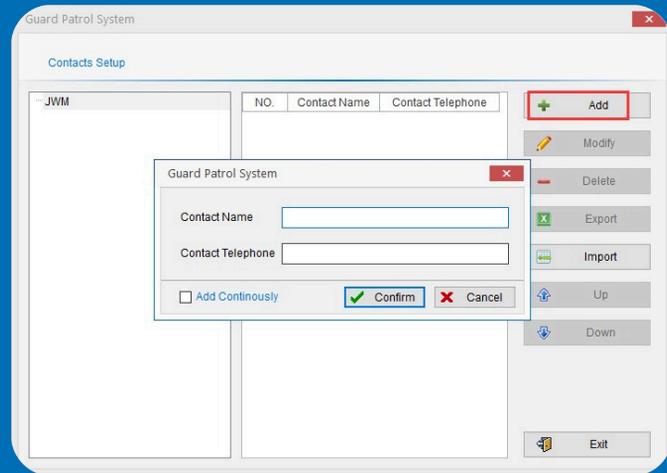

Step 1: Add contacts.
Step 2: Download Data

4

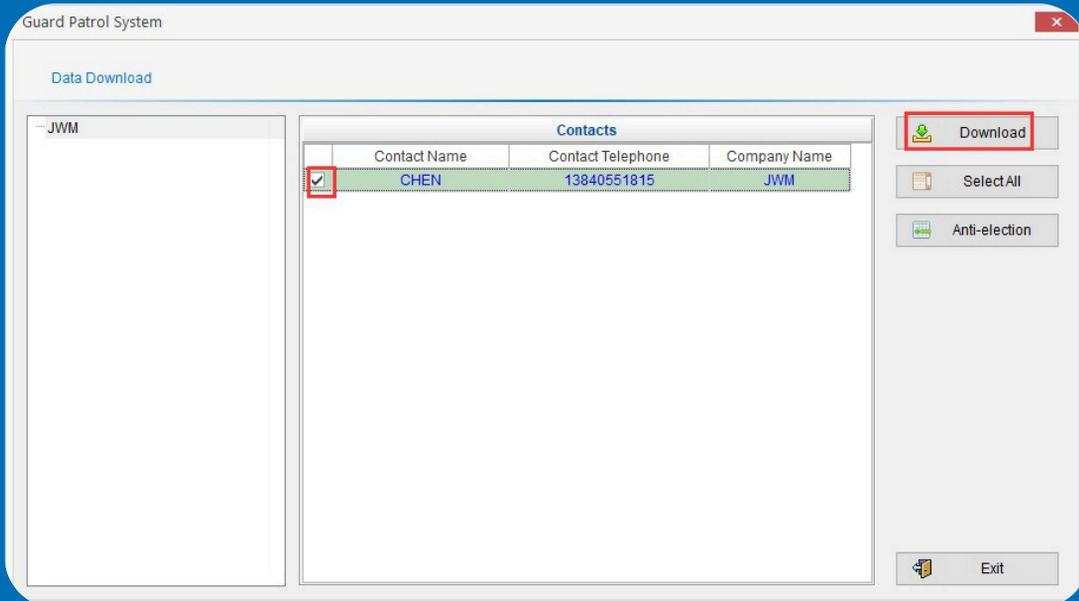

11 SMTAARNTA AG EPA YTORUORL GUARDS (OPTIONAL)

Now, you are ready to start a new patrol!
Take the device to read checkpoints that you have install in different places.



4
2

During the patrol, you can see the real time data in the “Real-time Monitoring”

4

Guard Patrol System

Basic Operation Patrol Setup Data Maintain


Read Data History Data Patrol Report Statistics Omission Alarm Alarm Data **Real-time Monitoring** Log Information Clear Reader Data Reader Timing Exit

NO	Company Name	Guard	Checkpoint Name	Reader Code	Patrol Time
1	JWM	Andy	site 1	1101-17111111	2017/5/27 11:45:48
2	JWM	Andy	site 3	1101-17111111	2017/5/27 11:44:51

END PATROL TOUR SMTAARNTA AG EPA YTORUORL GUARDS (OPTIONAL)


Inquiry Condition	NO	Company Name	Plan Guard	Start Time	End Time	Plan Name	Plan Times	Arrived Times	Omission
Start Time: 2017-05-16 00:00	1	AN PATROL		2017-05-16 9:00:00	2017-05-16 10:00:00	PATROL	6	0	6
End Time: 2017-05-18 00:00	2	AN PATROL		2017-05-16 10:05:00	2017-05-16 11:05:00	PATROL	6	0	6
Company Name: AN PATROL	3	AN PATROL		2017-05-16 11:10:00	2017-05-16 12:10:00	PATROL	6	0	6
Plan Name:	4	AN PATROL		2017-05-16 12:15:00	2017-05-16 13:15:00	PATROL	6	0	6
Checkpoint Name:	5	AN PATROL		2017-05-16 13:20:00	2017-05-16 14:20:00	PATROL	6	0	6
Reader Code:	6	AN PATROL		2017-05-16 14:25:00	2017-05-16 15:25:00	PATROL	6	0	6
Data Type: All Data	7	AN PATROL		2017-05-16 15:30:00	2017-05-16 16:30:00	PATROL	6	0	6
	8	AN PATROL		2017-05-17 9:00:00	2017-05-17 10:00:00	PATROL	6	0	6
	9	AN PATROL		2017-05-17 10:05:00	2017-05-17 11:05:00	PATROL	6	0	6
	10	AN PATROL		2017-05-17 11:10:00	2017-05-17 12:10:00	PATROL	6	0	6
	11	AN PATROL		2017-05-17 12:15:00	2017-05-17 13:15:00	PATROL	6	0	6
	12	AN PATROL		2017-05-17 13:20:00	2017-05-17 14:20:00	PATROL	6	0	6
	13	AN PATROL		2017-05-17 14:25:00	2017-05-17 15:25:00	PATROL	6	0	6
	14	AN PATROL		2017-05-17 15:30:00	2017-05-17 16:30:00	PATROL	6	0	6

Inquiry Condition	NO	Company Name	Guard	Checkpoint Name	Reader Code	Patrol Time
Start Time: 2017-05-16 00:00	1	AN PATROL		door6	0C01-12345678	2017-05-16 20:06:3...
End Time: 2017-05-18 00:00	2	AN PATROL		door5	0C01-12345678	2017-05-16 20:06:57
Company Name: AN PATROL	3	AN PATROL		door6	0C01-12345678	2017-05-16 20:06:58
Checkpoint Name:	4	AN PATROL		door5	0C01-12345678	2017-05-16 20:06:59
Reader Code:	5	AN PATROL		door6	0C01-12345678	2017-05-16 20:07:00
Sequence Order: Sequence as Time	6	AN PATROL		door5	0C01-12345678	2017-05-16 20:07:01
	7	AN PATROL		door6	0C01-12345678	2017-05-16 20:07:04
	8	AN PATROL		door5	0C01-12345678	2017-05-16 20:07:05
	9	AN PATROL		door6	0C01-12345678	2017-05-16 20:07:06
	10	AN PATROL		door5	0C01-12345678	2017-05-16 20:07:07
	11	AN PATROL		door6	0C01-12345678	2017-05-16 20:07:09
	12	AN PATROL		door5	0C01-12345678	2017-05-16 20:07:10
	13	AN PATROL		door6	0C01-12345678	2017-05-16 20:07:11
	14	AN PATROL		door5	0C01-12345678	2017-05-16 20:07:12

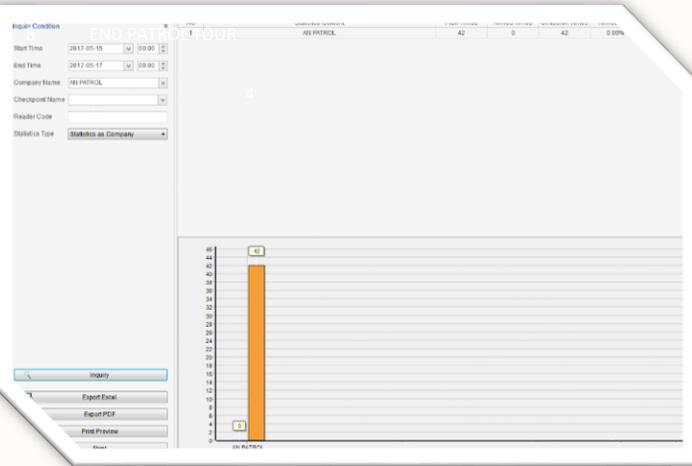


Finally, you can see the data in "Patrol Report", "History Data" and "Statistics". You can also export the Excel or PDF about the report.

You can send an alarm manually to the software. And it will appear on Alarm Data as shown in the picture. (Sending Alarm Data by Pressing Right Button)

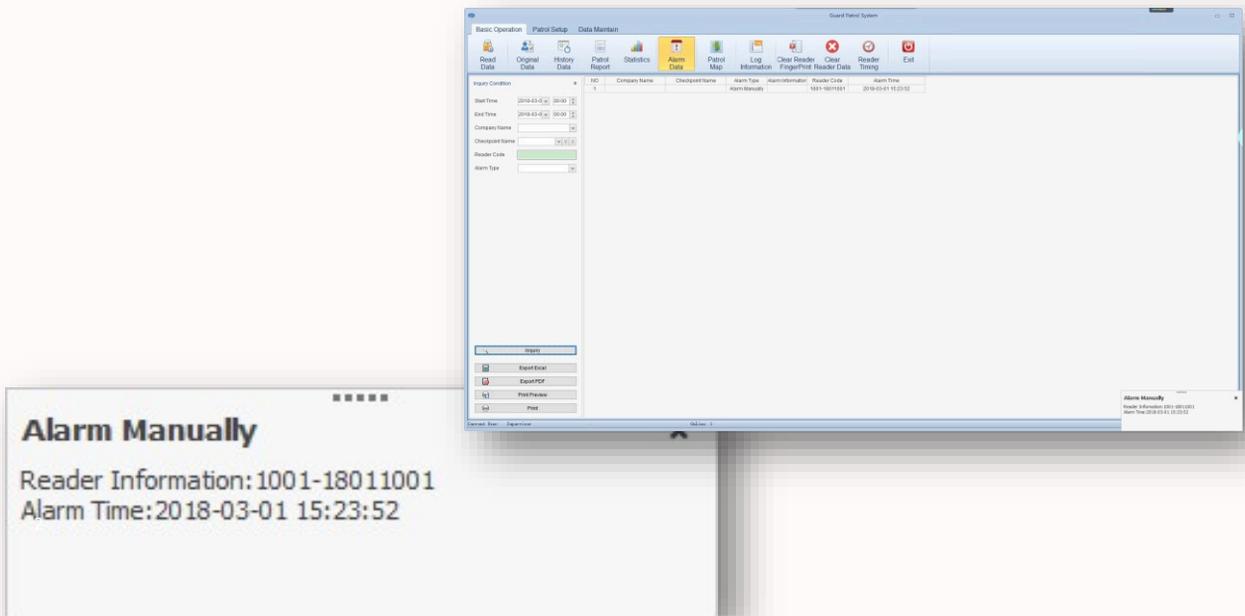

In Patrol Map, you can see online data and Google Map after you have sent data manually and automatically.

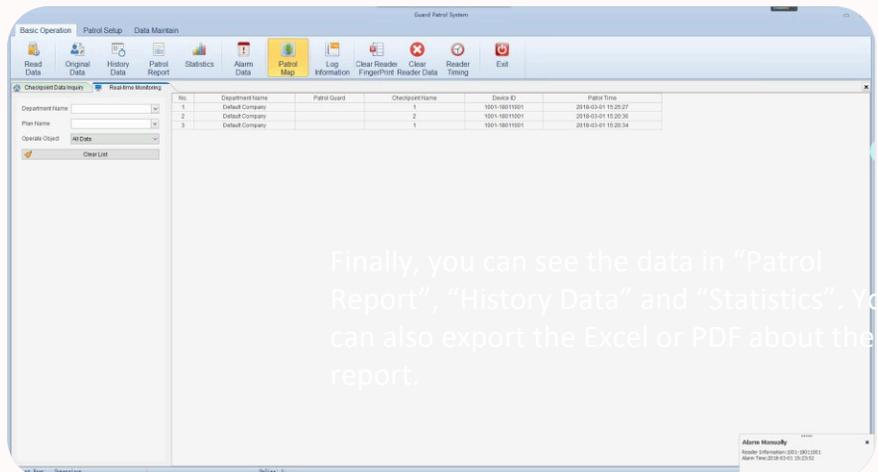

Finally, you can see the data in "Patrol Report", "History Data" and "Statistics". You can also export the Excel or PDF about the report.

JWM-Patrol guard tour system



JUST WORK MIRACLE

sales@jwm-rfid.com
support@jwm-rfid.com